

2900 E



www.ommelift.dk

TRAILER MOUNTED BOOM PLATFORM

OMME LIFT A/S – Lægårdsvej 4 – DK 7260 Sdr. Omme
Phone: + 45 753 413 00 – Fax: + 45 753 415 92
E-mail: omme@ommelift.dk – Web: www.ommelift.dk


OMMELIFT



Quality since 1906

2900 E

Mounted on trailer

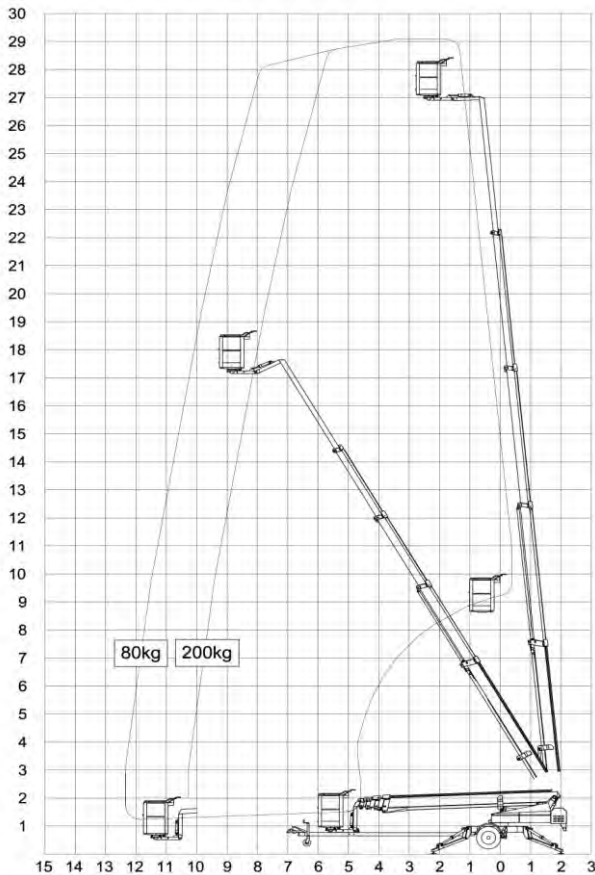

| Technical data: | 2900 E | 2900 EB | 2900 EBD |
|------------------------|---------------|--------------|----------------|
| Max. working height | 29.00 m | | |
| Max. outreach | 12.30 m | | |
| Max. basket load | 200 kg | | |
| Basket size | 1.25x0.8x1.1m | | |
| Turnable basket | ± 41° | | |
| Rotation | ± 40° | | |
| Power supply | 230V/16A | Battery | Battery/diesel |
| Batteries | | 24V/200Ah/5h | 24V/200Ah/5h |
| Charger | | 24 V/30 A | 24 V/30 A |
| Diesel engine | | | 14kW/18.8hp |
| Generator | | | 24 V/22 A |
| Transport length | 9.20 m | | |
| Transport height | 2.10 m | | |
| Transport width | 1.70 m | | |
| Operational width | 4.25 m | | |
| Total weight | 3400 kg | 3400 kg | 3500 kg |
| Controls | Proportional | | |
| Hydraulic stabilizers | + | | |
| Hydraulic propulsion | + | | |
| 230 V outlet in basket | + | | |

+ Standard

OVERVIEW – 29 METER



Angle boom



Propulsion



Easy control



Transport

- 2900E, 2900EB and 2900EBD are identical apart from their power sources. Standard features include hydraulic stabilizers with interlocks, basket rotation and proportional controls with dual controls from ground and basket. Design features include a basket mounting that forms a "fly" boom mounted to the top boom section and gives increased outreach over obstacles. The specially designed steel booms made from high and broad profiles allow greater outreach whilst maintaining a high degree of stability and rigidity. Being shorter in travel length than most machines of this type, the 2900E-series allows improved manoeuvrability.
- 2900E is main powered 230 V/16 A and is especially suitable, where continuous or extended operation is required.
- 2900EB is powered by a heavy duty 24 V battery pack with built-in charger capable of charging the batteries whilst the platform is in use. 2900EB is especially suited for jobs, without mains access.